

For reliable measurement, control and indication of rotational speeds



## RT STROBE 3000 LED

Outstanding light intensity  
with intelligent LED-technology  
for web-width up to 300 mm

Low-wear technology  
with LEDs

light intensity and image  
sharpness adjustable

Homogeneous, large area  
illumination 200 x 300 mm

For web widths > 300 mm strobes  
can be connected in parallel





## High-performance stationary LED-stroboscope with powerful light output and homogenous illumination area up to web-width 300 mm

**High light output** Due to the configuration with 80 high-performance LEDs, the *RT STROBE 3000 LED* offers a powerful light intensity. The large, homogeneous illumination surface delivers superb results even at difficult light conditions, making the *RT STROBE 3000 LED* suitable for a very wide range of measurement, observation and inspection functions. It is especially suitable for demanding applications, such as those in the printing industry.

**High focus** With an adjustable flash duration from 1–1000 µseconds, you will easily find the best combination between light intensity and sharp images for every application.

**Flexible adjustment to all applications** Alternatively, the stroboscope can be controlled directly by the trigger signal of your system without the need for additional control units or by various *RT STROBE control* devices. When using these trigger options simultaneously, you can easily alternate between the signal inputs by using the switch on the reverse side of the device.

**Additional control options** The *RT STROBE control* model range includes two devices for varying the control of the *RT STROBE 3000 LED*:

*RT STROBE eco control* – a simple and inexpensive unit for controlling flash frequency. You simply insert this small control unit into one of the sockets on the reverse side of the device.

*RT STROBE control* – for adjusting the flash frequency, phase shift, delay time and trigger divider. This unit is connected to the stroboscope by cable and provides the convenience of remote control even if the stroboscope within your machine is difficult to access.



# RT STROBE 3000 LED

S.I. Instruments  
256 South Rd. Hilton  
South Australia 5033  
Ph (08) 8352 5511

[info@si-instruments.com.au](mailto:info@si-instruments.com.au)  
[www.si-instruments.com.au](http://www.si-instruments.com.au)

## Technical data

General Parameters	
Frequency range	0...120,000 FPM (flashes per minute)
Power supply	24 VDC (+/- 10%) / 15 W
	DIN 41524 5-pin standard plug
	universal power supply unit available
External trigger input	3...30 V / max. 5 mA
	potential-free optocoupler
	DIN 41524 5-pin standard plug
	U <sub>out</sub> = U <sub>in</sub> , max. 200 mA
	switchable trigger input
Trigger output	for parallel connection
Flash Parameters	
Light intensity/sharpness	adjustable with turning knob
Light intensity single flash approx.	0,7 Mega-Lux / 30 cm / 12"
Light intensity	max. 6,000 Lux / 30 cm / 12"
Illumination area	20x30 cm / 8x12"
Flash colour	approx. 5,000...8,300 K
Housing	
Material	Aluminium
Dimensions	150x130x112 mm / 6.0x5.1x4.4"
Weight	950 g
Ambient Conditions	
Ambient temperature	0°...40°C (32°...104°F)
Storage temperature	-25°C...70°C (-13°...158°F)
Humidity	max. 95% not condensing
Certifications	
Certificate of CE conformity	

### Scope of delivery


A6-3200: RT STROBE 3000 LED stroboscope, operating instructions, 1 plug for connection of trigger input and/or power.

A6-3210: RT STROBE 3000 LED stroboscope, power supply unit, operating instructions, 1 plug for connection of trigger input and/or power.

### Accessories (optional)

Tripod/wall mounting, power supply unit, plug for trigger signal/supply connection, Stroboscope control units: RT STROBE control or RT STROBE eco control.

### Illumination level

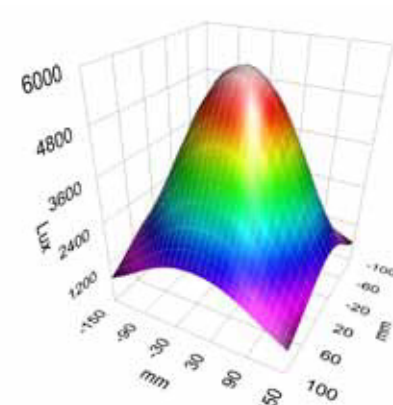

## RHEINTACHO Messtechnik GmbH

Waltershofener Straße 1  
79111 Freiburg · Germany  
Telefon +49 (0)761 45 13 0  
Telefax +49 (0)761 44 52 74  
[info@rheintacho.de](mailto:info@rheintacho.de)  
[www.rheintacho.de](http://www.rheintacho.de)

We reserve the right to make technical changes.

N0001.971